

EN AT-31, AT-31S
100V LINE ATTENUATORS




DESCRIPTION

Audio attenuator with 9 positions and 'OFF'.


CONNECTION

It can be used for 2-wire 100 V lines and 3-wire 100 V lines with priority for emergency calls, following the connection diagrams below:

Example of 2-wire 100 V line connection

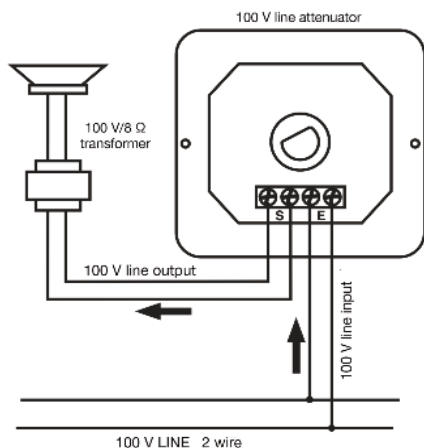

Example of connection for 3-wire 100 V line in systems with priority for emergency calls

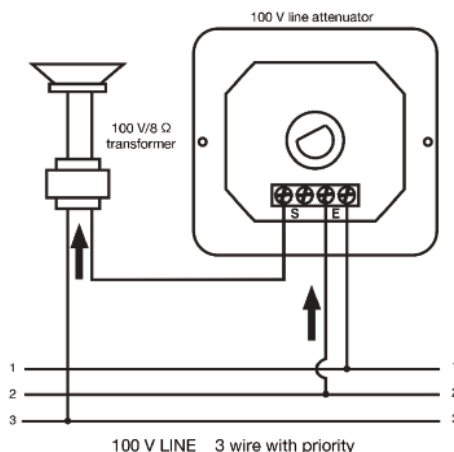

NOTE: View of attenuator from the front

In the case of a 3-wire 100 V line connection being used:

- In normal operating conditions the 100 V line corresponds to wires 1 and 2.
- In emergencies the 100 V line switches to wires 2 and 3.

SPECIFICATIONS

	AT-31	AT-31S
CHARACTERISTICS	100 V line attenuator with resistance. 2-wire input and 3-wire priority systems.	
POWER	10 W maximum	
INPUT	High Z 100 V line	
OUTPUT	High Z 100 V line	
DIMENSIONS	Total: 82 x 82 x 55 mm depth	Total: 82 x 82 x 62 mm depth
	Insert: 54 x 50 x 33 mm depth	
CONTROL	9 attenuation positions and 'OFF'	
	For standard box Distance between screws: 60 mm	With box for surface installation

WARRANTY: 2 years against manufacturing defects, accompanied by proof of purchase. Does not cover post-purchase damage or breakage.



FONESTAR is a member of ECOEMBALAJES ESPAÑA, S.A. "ECOEMBES", with number 03497 and all our products carry the symbol, backed by our membership and subscription to the above mentioned organization with the recycling and subsequent management of our packaging.

FONESTAR S.A. - NIF A28780443 - Apartado 191 - 39080 - Santander, Cantabria, (España)
www.fonestar.com